SentinelPro™ Diverter Trim and Shower Package (Valve not included)

# **FEATURES:**

• CPT-5401: Diverter Shower Valve Trim

Hand Held Shower with Pause/Trickle • VS-100-PC:

• VS-115: Supply Ell with Wall Flange

• VS-117: Vacuum Breaker • VS-123: 30 in. Slide Bar

• VS-145: 69 in. Metal Stainless Steel Hose

# **VALVE OPTIONS:**

• CPV-TP2-DV: Thermostatic/Pressure Balancing

Diverter Valve

Sweat & Thread Connections

## STOCK FINISHES:



### **STANDARDS:**

ASME A112.18.1/CSA B125.1 certified

ADA Compliant

# **WARRANTY:**


Visit www.speakman.com for full product warranty information

• See Speakman.com For Warranty Information



Information continues on next page

SentinelPro™ Diverter Trim and Shower Package (Valve not included)

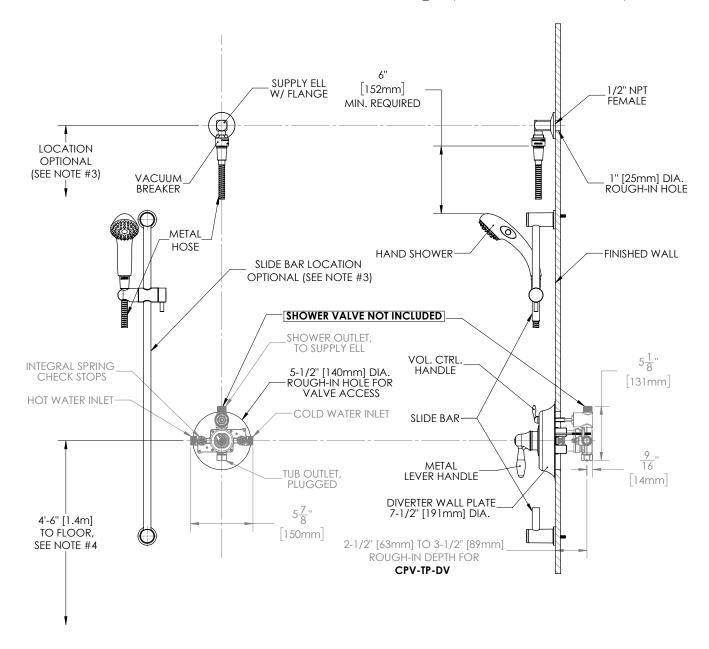

#### **NOTES:**

- ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT 1. NOTICE.
- THE LOCATIONS OF THE SLIDE BAR AND SUPPLY ELL ARE OPTIONAL, BUT RESTRICTED BY THE 69" HOSE LENGTH RUNNING FROM THE SUPPLY ELL CONNECTION TO THE HAND SHOWER AND THE 6" MINIMUM REQUIREMENT BETWEEN THE IN-LINE VACUUM BREAKER AND TOP OF THE HAND SHOWER (HAND SHOWER ADJUSTED TO HIGHEST POSITION).
- FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.

92-SLV-5440-RH-01