



HIGH SECURITY VENT FLASHING


ROOF FLASHING

The high security vent flashing is ideally suited for school roofs and other building areas susceptible to mischief and tampering. A key feature is the locked-on cap which resists removal and keeps the venting operation secure.

The vent flashing is constructed of heavy duty (.051) aluminum. Its rigid design will not succumb to abuse and offers long term performance. In addition, the 7" (178mm) opening at the base and 4" (102mm) surrounding flange allow for secure flashing.

FEATURES:

- Secures Plumbing Vent Stacks
- Protects Roof Penetrations
- Reduces Vandalism
- Simplifies Installation

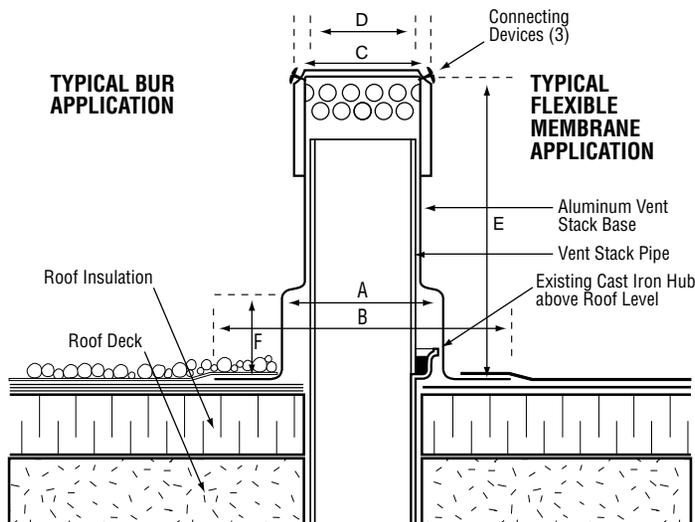

Description	Code	Size
Base Opening	A	7" 178 mm
Base Flange Overall Diameter	B	15 1/4" 387 mm
Cap Diameter	C	5 3/4" 146 mm
Vent Outlet Diameter	D	4 3/4" 121 mm
Height Overall	E	15 1/4" 387 mm
Max. Hub Height Over Roof Level	F	5 1/2" 140 mm
Flashing Width	G	4" 102 mm



367 Nagel Drive, Buffalo, NY 14225-4732
 PH: (716) 685-3340 • FAX: (716) 685-1108

FOR MORE INFORMATION:
 CALL TOLL-FREE 1-800-828-8424
 Website: www.marathondrains.com • E-mail: mrp@marathondrains.com