Sentinel Mark II® Diverter Trim, Shower and Tub Package (Valve not included)

MODELS:

• SLV-3450: Includes VS-100-PC 2.5 GPM (9.5 L/min)

Flow Rate Hand Held Shower

• SLV-3450-E175: Includes VS-100-PC-E175 1.75 GPM

(6.6 L/min) Flow Rate Hand Held Shower

FEATURES:

• CPT-3401: Diverter Shower Valve Trim

• VS-100-PC or Hand Held Shower

VS-100-PC-E175: with Pause/Trickle ButtonVS-115: Supply Ell with Wall Flange

VS-117 Vacuum Breaker VS-123: 30 in. Slide Bar

• S-1554: Tub Spout

• VS-145: 69 in. Metal Stainless Steel Hose

VALVE OPTIONS:

• CPV-PB-DV: Pressure Balance Diverter Valve

Sweat & Thread Connections

• CPV-PB-DV-PXC: Pressure Balance Diverter Valve

PEX F1807 Crimp Inlet Connections

• CPV-PB-DV-PXE: Pressure Balance Diverter Valve

PEX F1960 Cold-Expansion Inlet Connections

CPV-T2-DV: Thermostatic Diverter Valve
Sweat & Thread Connections

Sweat a Thread Confidential

• CPV-T2-DV-PXC: Thermostatic Diverter Valve

PEX F1807 Crimp Inlet Connections

• CPV-T2-DV-PXE: Thermostatic Diverter Valve

PEX F1960 Cold-Expansion Inlet Connections

STOCK FINISHES:



STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

• See Speakman.com For Warranty Information








Information continues on next page

Sentinel Mark II[®] Diverter Trim, Shower and Tub Package (Valve not included)

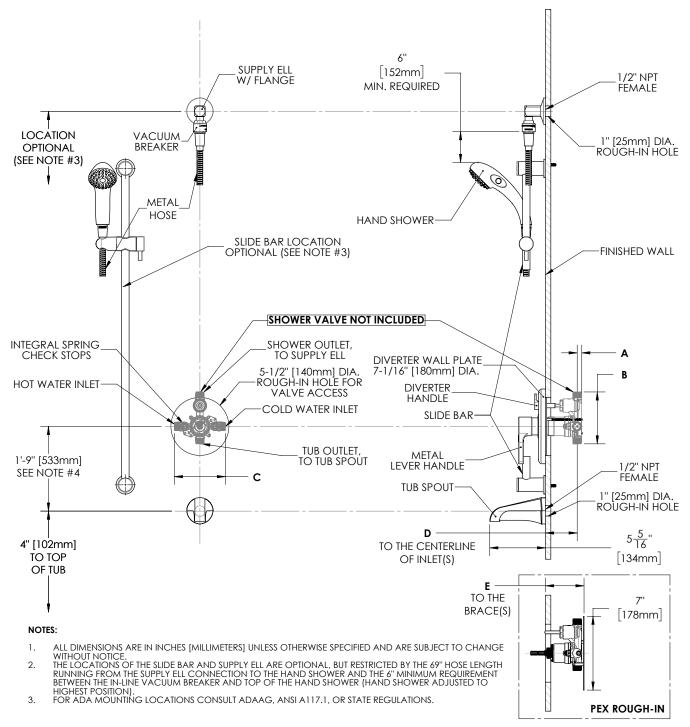

DIMENSION	CPV-PB-DV	CPV-T2-DV	CPV-PB-DV-PXC	CPV-PB-DV-PXE	CPV-T2-DV-PXC	CPV-T2-DV-PXE
Α	7/16" (11mm)	9/16" (14mm)	7/16" (11mm)		9/16" (14mm)	
В	4-15/16" (125mm)	5-1/16" (128mm)	4-15/16" (125mm)		5-1/16" (128mm)	
С	4-13/16" (123mm)	5-7/8" (150mm)	4-13/16" (123mm)		5-7/8" (150mm)	
D	2-1/2" (63mm) MIN TO 3-1/2" (89mm) MAX					
E			3-1/8" (79mm) MIN TO	4-1/8" (105mm) MAX	3-3/16" (81mm) MIN TO	4-3/16" (106mm) MAX