DRAWING NUMBER

SIZE

NONE

3-3-83

APPROVED

CHECKED BY:

DRAWN BY:

4436, 4437

NOTICE

TOLERANCE AND CHANGE WITHOUT


TO MANUFACTURERS

SCALE:

CAULK FERRULE CLEANOUTS WITH FRAME AND COVER

TAPER THREAD PLUG WITH ROUND FRAME AND COVER

FUNCTION: Used to cover cleanout plugs concealed in walls. Round design eliminates necessity for lining up with adjacent floors, ceilings, moldings, etc. The anchoring lugs provide easy means for securing the frame to the wall construction. The face-of-wall cover (4436) is for tile, masonry, or dry wall construction and is usually installed on an opening provided in the finished wall. The flush-with-wall cover (4437) is for plaster or wet wall construction and is installed during wall construction.

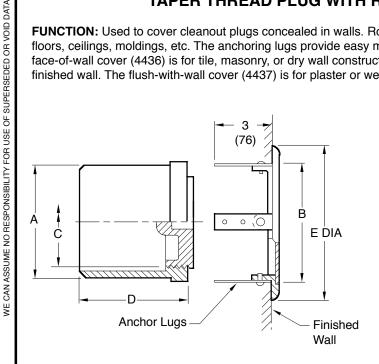




FIG. 4436C FACE-OF-WALL COVER

FIG. 4437C FLUSH-WITH-WALL COVER

	Α	В	С	D	E	F
	SIZE	OPENING	SIZE		DIA	DIA
\blacktriangle	02 (50)	4 (100)	1 1/2 (38)	3 1/2 (89)	6 (150)	4 1/2 (115)
\blacktriangle	03 (75)	5 1/2 (140)	2 1/2 (64)	3 3/4 (95)	7 (180)	5 3/4 (145)
lack	04 (100)	6 (150)	3 1/2 (89)	4 1/4 (110)	7 1/2 (190)	6 1/2 (165)
	05 (125)	6 (150)	4 1/2 (115)	4 1/4 (110)	7 1/2 (190)	6 1/2 (165)
	06 (150)	8 (205)	5 1/2 (140)	4 1/4 (110)	10 (255)	8 1/2 (215)
	08 (200)	10* (255)	7 1/2 (190)	4 1/2 (115)	-	10 1/2 (265)

▲ Sized for Service Weight and/or NO-HUB *Not available for 4436

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Caulk Ferrule with Cast Bronze Taper Thread Plug, Chrome Plated Bronze Round Frame and Secured Cover. Type of Cover as Indicated by Figure Number Selected.

VARIATIONS:

"T" Handle Plug -TH Plug Tapped 1/4"(6) -20 Thread Vandal Proof Screws -U

OPTIONAL MATERIALS:

Cast Bronze Body -BB Nickel Bronze Frame and Cover -NB Polished Bronze Frame and Cover -PB

J H G F	10-7-14 09/09/10 04/29/09
F	10-20-98

DATE

REV.

Revised Variations Revised Millimeters Revised 'D' Dimensions Revised S.W. and/or N.H

DESCRIPTION

TBW BW CL **TBW** JCS CKD. BY WEIGHT VOLUME POUNDS CUBIC FEET

FIGURE NUMBER 4436, 4437

IJ

BY