

# FLOOR DRAINS

## WITH 8 1/2" (215) ROUND TOPS AND SEDIMENT BUCKETS

### "SAFE-SET" BUCKET - WITH FLANGE

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

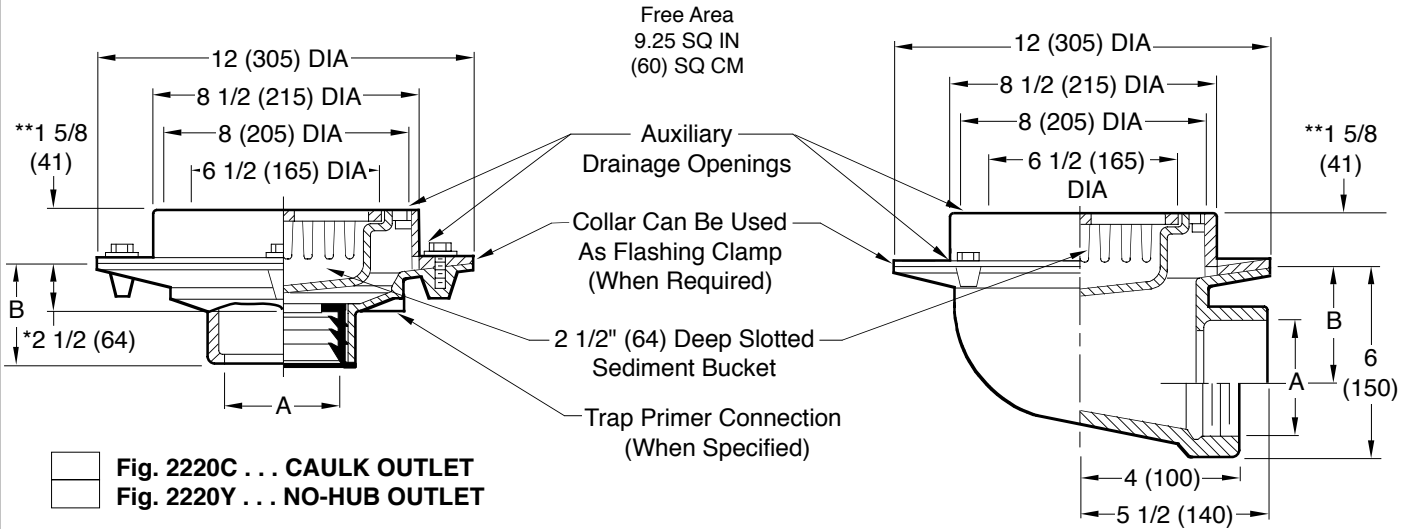


Fig. 2220C ... CAULK OUTLET  
 Fig. 2220Y ... NO-HUB OUTLET

<b>A SIZE</b>	02 (50)	03 (75)	04 (100)	06 (150)
<b>B</b>	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded		3 3/4 (95) NO-HUB Only	

Fig. 2225C ... CAULK OUTLET  
 Fig. 2225T ... THREADED OUTLET

<b>A SIZE</b>	02 (50)	03 (75)	04 (100)
<b>B</b>	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

\*This dimension to internal stop of speedi-set gasket  
 \*\*add 1/4" (6) when bronze top is specified.

**REGULARLY FURNISHED:**

Duco Cast Iron Body and Flashing Collar with Cast Iron Grate and Sediment Bucket.

**VARIATIONS:**

- Closure Plug -XP (Fig. 2220 only)
- Dome Grate -D
- Hinged Grate -H
- L Speedi-Set Service Weight (Fig. 2220 only)
- LXH Speedi-Set Extra Heavy (Fig. 2220 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2225 only)
- Square Top -S
- \*  Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
- Vandal Proof Grate -U
- Wide Flange Deck Drain (Specify Fig DX2565)
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2220 Only)

**OPTIONAL MATERIALS:**

- Ductile Iron Bucket and Grate -MGB
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

\*Not available on Fig. 2220T threaded outlet drain.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2220  
 SIZE A  
 SCALE: NONE  
 DATE: 5-17-85  
 APPROVED BY: TD  
 CHECKED BY: TD  
 DRAWN BY: BS  
**2220, 2225**  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

J	7-25-19	Added Load Rating	MW	JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
H	6-18-19	Removed Function	MW	JM			
G	3-7-16	Revised Function	TBW	CL			
F	6-12-15	Revised Variations	TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY	<b>2220, 2225</b>		