

OUTDOOR SHOWERS

Shower Series

MODEL M-PCS24 TWO STATION POOL AND BEACH SHOWER

STANDARD FEATURES

- Pushbuttons requiring less than 5 pounds for activation
- Adjustable Timing, from 5 to 60 seconds
- Chrome plated brass Showerheads with 1.6 GPM Flow Controls and adjustable spray pattern
- Vandal resistant fasteners
- Shut-off Valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish


SUGGESTED SPECIFICATIONS

Column Shower shall be Murdock model M-PCS24, dual station Shower. Unit is to be pre-piped and hydrostatically tested.

Valves shall have internally mounted metering Valves, Pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Showerheads shall be chrome plated brass with 1.6 GPM Flow Restrictors and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel Bottom Plate, providing secure mounting for Shower.

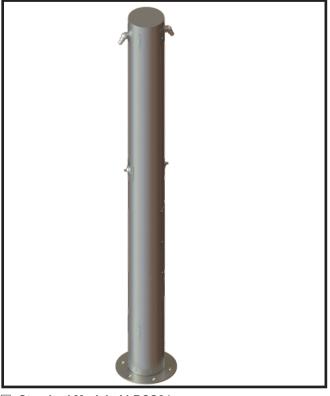

■ Standard Model: M-PCS24

MODEL:

(Must Specify)

☐ M-PCS24	Satin Stainless Finish (Shown)
☐ M-PCS25	Green Powder-Coated
☐ M-PCS26	Red Powder-Coated
☐ M-PCS27	Blue Powder-Coated
Custom color finis	shes available upon request

OPTIONS

(additional costs may be incurred)

🔲 - FRU2	Underground Freeze-Resistant Valve for two Pushbuttons ¹
🔲 - FRU3	Underground Freeze-Resistant Valve for three Pushbuttons ¹
🗖 - FRU4	Underground Freeze-Resistant Valve for four Pushbuttons ¹
🔲 - FS	Foot Shower at one station ¹
🔲 - FS2	Foot Shower at two stations ¹
☐ - GB	Grab Bar - Two vertical Grab Bars and second lower Showerhead at 48 1"
🔲 - IAP	In-ground Anchor Plate (replaces standard Anchor Plate) ¹

Customer specified logo1

Options Notes:

- LOGO

¹ See separate option sheet.

Complies with the following standards:









Recyclable Product

Please visit www.murdockmfg.com for most current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com


Revised: 12/13/19



OUTDOOR SHOWERS

All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

Shower Series

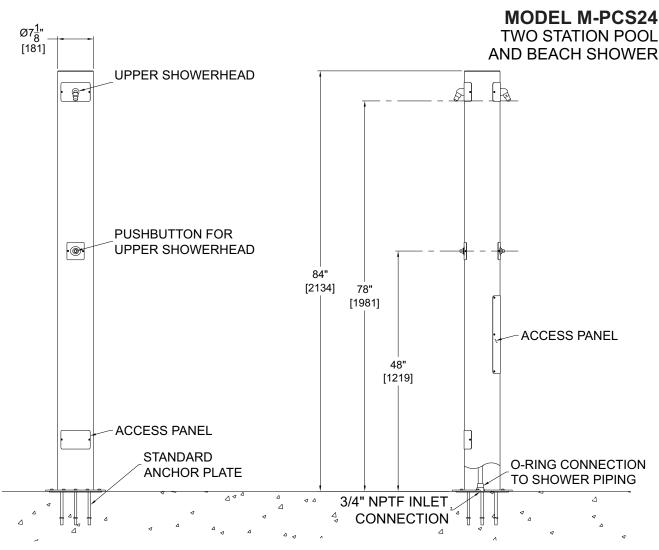

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM]

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

UMMARY AL FOR URING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
<i>∨</i> 0 ~ –	I Company		assumes no responsibility for use of void or superseded data. Dimensions
ECTION S APPROV ANUFAC	Contact		may change with the addition of optional accessories. Murdock Mfg.™,
R AP	Signature		Member of Morris Group International™. Please visit
SELE M,	(Approval for Manufacturing)		www.murdockmfg.com for most current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP