

FIXTURE SUPPORTS

FIG. 0913, 0914, 0915, SERIES HEAVY DUTY SUPPORTS FOR SURGICAL SCRUB-UP AND FLUSHING RIM SINKS FLOOR MOUNTED TYPE



FIXTURE SUPPORTS

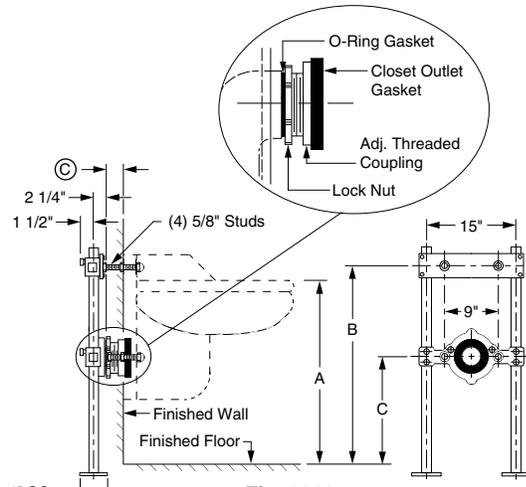


Fig. 0913 Side View

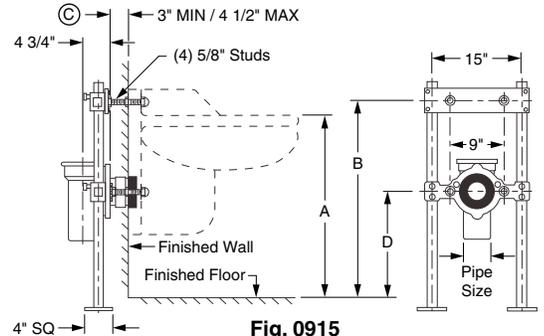


Fig. 0915 Side View

© This dimension can be increased when fixture support is to be installed behind the wall (specify when required and wall thickness).

For lettered dimensions contact factory.

| FIGURE NO. | DESCRIPTION | PRICE | APPROX. WT. LBS. |
|------------|--|----------|------------------|
| 0913 | With Supporting Studs & Adjustable Coupling for 3" Back Outlet | 1,195.00 | 49 |
| 0914 | With Supporting Studs & Adjustable Coupling for 4" Back Outlet | 1,195.00 | 48 |
| 0915 | 4" Caulk Fitting with 4" Vent | 1,981.00 | 60 |
| 0915-1 | 4" Caulk Fitting with 2" Vent | 1,981.00 | 64 |
| 0915Y2 | 3" No-Hub Fitting with 2" Vent | 1,700.00 | 55 |
| 0915Y3 | 3" No-Hub Fitting with 3" Vent | 1,700.00 | 57 |
| 0915Y4 | 4" No-Hub Fitting with 2" Vent | 1,981.00 | 58 |
| 0915Y5 | 4" No-Hub Fitting with 4" Vent | 1,981.00 | 58 |

The water closet gasket regularly furnished is made of molded neoprene and designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2M, Figure 13B. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2M, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

FIG. 0923, 0924, 0925, SERIES LABOR SAVER® HEAVY DUTY SUPPORTS FOR SURGICAL SCRUB-UP AND FLUSHING RIM SINKS FLOOR MOUNTED TYPE

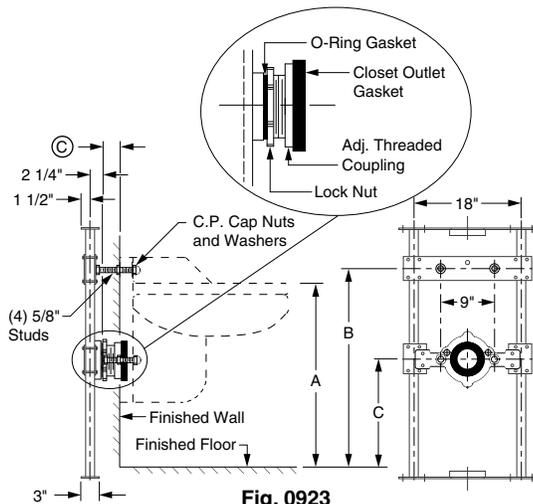


Fig. 0923 Side View

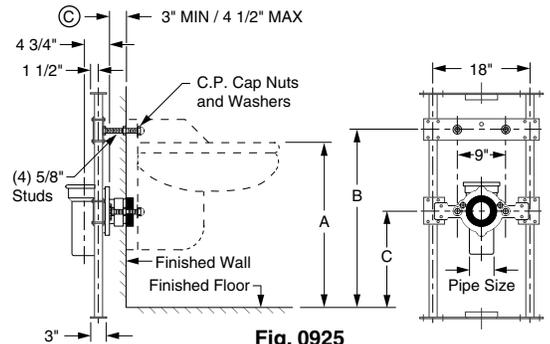


Fig. 0925 Side View

© This dimension can be increased when fixture support is to be installed behind the wall (specify when required and wall thickness).

For lettered dimensions contact factory.

| FIGURE NO. | DESCRIPTION | PRICE | APPROX. WT. LBS. |
|------------|--|----------|------------------|
| 0923 | With Supporting Studs & Adjustable Coupling for 3" Back Outlet | 1,558.00 | 49 |
| 0924 | With Supporting Studs & Adjustable Coupling for 4" Back Outlet | 1,558.00 | 48 |
| 0925 | 4" Caulk Fitting with 4" Vent | 2,578.00 | 60 |
| 0925-1 | 4" Caulk Fitting with 2" Vent | 2,578.00 | 64 |
| 0925Y2 | 3" No-Hub Fitting with 2" Vent | 2,217.00 | 55 |
| 0925Y3 | 3" No-Hub Fitting with 3" Vent | 2,217.00 | 57 |
| 0925Y4 | 4" No-Hub Fitting with 2" Vent | 2,578.00 | 58 |
| 0925Y5 | 4" No-Hub Fitting with 4" Vent | 2,578.00 | 58 |

The water closet gasket regularly furnished is made of molded neoprene and designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2M, Figure 13B. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2M, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

NOTE: Service weight regularly furnished on fittings above.
NOTE: Always specify fixture manufacturer's model name and number.

†REGULARLY FURNISHED