


## R1220

## LARGE SUMP DEXOTEX ROOF DRAIN WITH WIDE DECK FLANGE FOR A LIQUID MEMBRANE ROOF

**Specification:** MIFAB® Series R1220 lacquered cast iron medium sump roof drain with 12" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, and standard self-locking cast iron dome strainer with a free area of 71.50 square inches.

**Function:** Used in any type of flat roofs where a medium sized drain is required. Wide anchor flange and membrane clamp with deep groove design provides for secure grip of membrane and roof flashing materials.

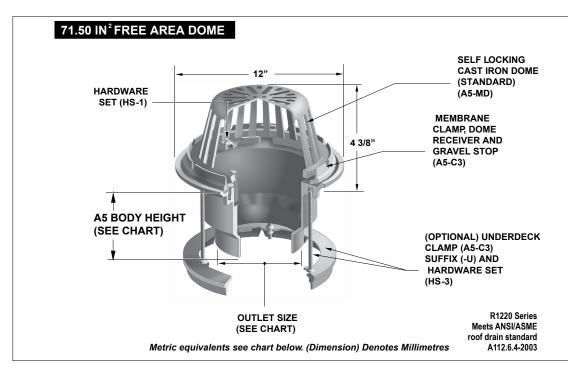





A5-MD



----



HS-1

PIPE SIZE	BODY HEIGHT	
	NO HUB (STANDARD	INSIDE CAULK (X)
2" (51)	6 1/2" (165)	6.575 (167)
3" (76)	6 1/2" (165)	6.575 (167)
4" (102)	6 1/2" (165)	6.575 (167)
6" (152)	6 1/2" (165)	6.575 (167)

SUFFIX -6	OPTIONAL VARIATIONS Vandal proof dome (metal dome only)	SUFFIX -G	OPTIONAL VARIATIONS Stainless steel ballast guard
-11	Acid resistant epoxy coating	-HC	Adjustable ballast guard with sec. clamp
-12	Galvanized metal dome	-JC	S.S. ballast guard with secondary clamp
-12A	Galvanized body and membrane clamp	-PA	Pennsylvania Steel Act compliant product
-13	Galvanized body, membrane clamp and dome	-R	2" external water dam
-83	Stainless steel mesh screen over metal dome	-RG	RoofGuard non clogging cast iron dome
-B	Sump receiver	-U	Underdeck clamp
-BA	Buy America Act compliant product	-U3	Underdeck clamp with cutaway side
-E	Adjustable extension	-W-1	Water proofing flange
-EG	Galvanized Adjustable extension	Х	Inside caulk outlet (2",3",4")
		-XJ	Vertical expansion joint (see R1900)
		-Z	Extended wide elastomeric flange (20" diameter x 1/4" thick)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No: