


## **2100** Floor Drain with Square Adjustable Top – Perforated Grate

Regularly Furnished: Painted cast iron floor drain with anchor flange, seepage openings, clamping collar, ductile iron perforated grate, adjustable collar, ½" NPT trap primer tap (plugged) and bottom outlet.

ASME Load Rating = X.H. (Extra Heavy Duty) 7,500-10,000Lbs.

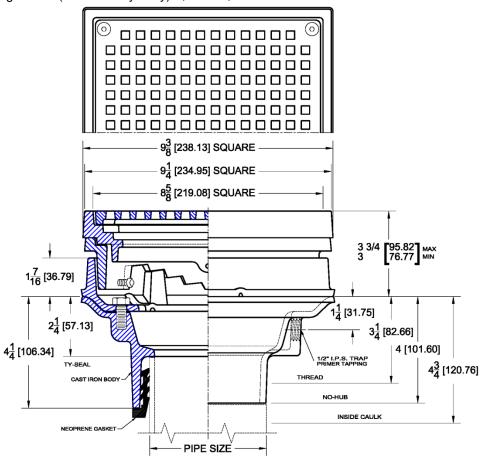

Top Material				
<b>✓</b>	Suffix	Description		
	-1	Satin Finish Nickel Bronze Veneer		
	-2	Satin Finish Bronze Veneer		
	-12	Ductile Iron		
	-102	Polished Chrome Plated Brass Veneer		
	-304	Satin Finish 304 Stainless Steel Veneer		

	Outlet Variations				
✓	Туре	Designation			
	No-Hub	2NH, 3NH, 4NH, 6NH			
	Push-On	2TY, 3TY, 4TY			
	Inside Caulk	2IC, 3IC, 4IC			

Funnels			
✓	Suffix	Description	
	-EF4	4" Round Funnel Assembly	
	-EF6	6" Round Funnel Assembly	
	-EG8	8" Elongated Funnel Assembly	

	Options				
✓	Suffix	Description			
	-ARC	Acid Resistant Coating (C.I. Parts)			
	-SO	90 Degree Side Outlet (3TY, 4TY, 6TY)			
	-TSD	Trap Seal Device (Model 4405)			
	-VP	Vandal Proof Secured Grate			
	-8	Secondary Strainer			
	-14	Hinged Grate			
	-18	Solid Cover			
	-23	Grate Riser (1-1/2" High)			
	-27	Sediment Bucket			
	-31	Backwater Valve (2,3,4" Only)			
	-33	Closure Plug			
	-39	Galvanized Iron Parts			
	-83	Special Engraving			
	-123	Stainless Steel Mesh Lined Bucket			