

CONTEMPORARY DRINKING FOUNTAINS

GS Series

MODEL GSD75-BP6 BARRIER FREE, BI-LEVEL, WALL MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- Both Child and Adult ADA Compliant (when properly installed)
- Resistant to sunlight, heat moisture and wear
- 18 gage, 304 stainless steel bowl
- 12 gage, heavy duty stainless steel arm, corrosion and scratch resistant finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- P-trap, 1-1/4" O.D.
- Vandal resistant bottom stainless steel plate and screws
- Mounting plate
- Back panel

SUGGESTED SPECIFICATIONS

Model GSD75-BP6 is a wall mounted, vandal resistant bi-level square drinking fountain made from 18 gage, 304 stainless steel bowls mounted into green powder coated 12 gage, heavy duty stainless steel support arms with a steel powder coated back panel. Unit shall be activated by front mounted self-closing buttons, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bubblers shall be polished chrome plated brass with non-squirt features and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.



MODEL:

(Must Specify)

☐ GSD74-BP6 Satin stainless finish

Green powder-coated (Shown) ☐ GSD75-BP6

☐ GSD76-BP6 Red powder-coated ☐ GSD77-BP6 Blue powder-coated

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

-CSC Concealed support carrier (2 required)

☐ -FRA4 Freeze resistant valve system

☐ -SK6 Skirt kit (finish match)



Member of U.S. Green



Recyclable Product



Please visit www.murdockmfa.com for most current specifications.















CONTEMPORARY DRINKING FOUNTAINS


All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRA" WILL DIFFER FROM STANDARD, REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

GS Series

MODEL GSD75-BP6

BARRIER FREE, BI-LEVEL,

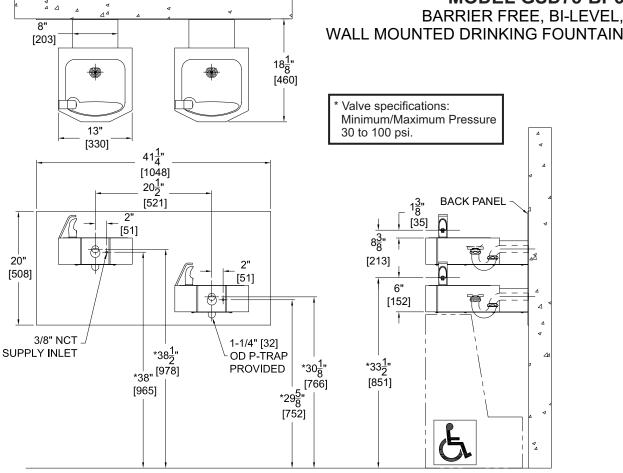

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
- 3. STOP VALVE NOT PROVIDED.

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

UMMARY AL FOR TURING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
SAL	Company		assumes no responsibility for use of void or superseded data. Dimensions
ECTION SU APPROVA ANUFACTI	Contact	Title	may change with the addition of optional accessories. Murdock Mfg.™,
SELEC & AF MAN	Signature (Approval for		Member of Morris Group International™. Please visit www.murdockmfg.com for most
S	Manufacturing)	Date	current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP