

F

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

FLOOR DRAINS

INTEGRAL TRAP AND FLOOR-LEVEL CLEANOUT DRAINS

FUNCTION: Used in moderate traffic areas where deep trap seal, floor level cleanout and shallow side outlet rough-in and required where limited space is available. Drain includes these features in one compact casting.

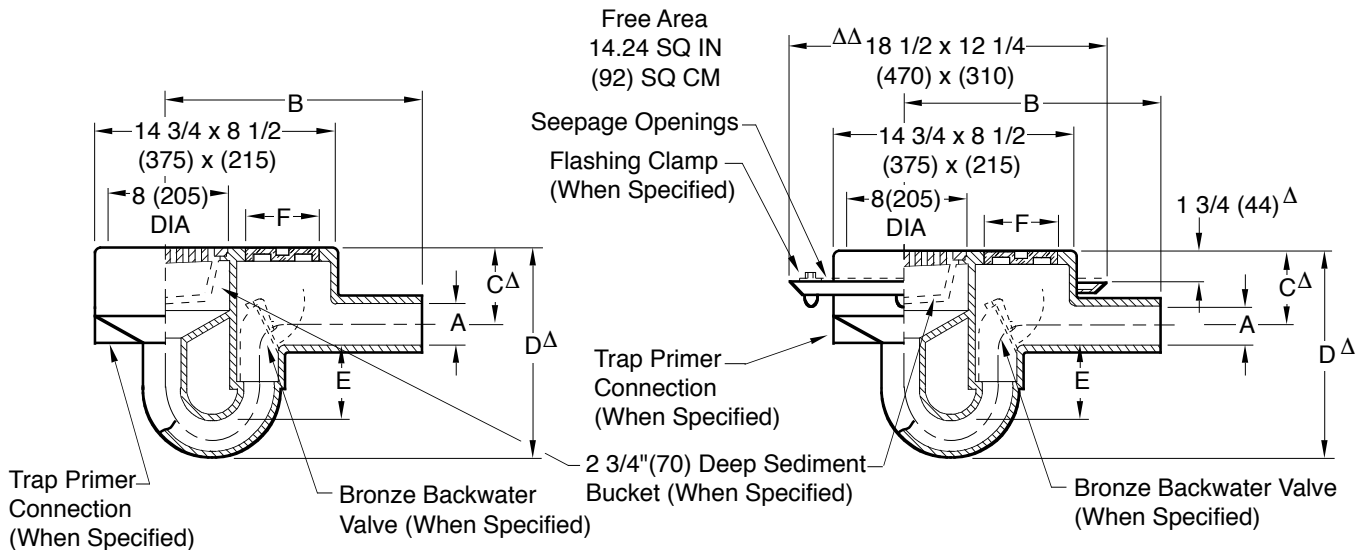


Fig. 2510S ... LESS FLANGE

Fig. 2515S ... WITH FLANGE

NOTE: When bucket is specified grate cannot be inserted unless bucket is put in place.

A SIZE	B	C	D	E SEAL	F N.P.T.
02 (50)	16 (405)	4 1/4 (110)	11 3/4 (300)	4 (100)	5 (125)
03 (75)	15 3/4 (400)	4 (100)	13 1/2 (345)	4 1/2 (115)	5 (125)
04 (100)	16 (405)	4 1/2 (115)	15 3/4 (400)	4 3/4 (120)	5 (125)

ΔΔ 2"(50) size 18 3/4(475) x 12 1/2(320)

■ Meets ANSI Spec A 112.21-1M

Δ add 3/16"(5) when bronze top is specified

**SPIGOT OUTLET
SIZED FOR NO HUB
AND/OR SERVICE WEIGHT**

REGULARLY FURNISHED:
 Duco Cast Iron Body and Grate with Bronze Cleanout Plug.

- VARIATIONS:**
- Auxiliary Inlet -N 03"(75) and 04"(100) sizes only -N15 1 1/2"(38), -N2 2"(51)
 - Backwater Valve -V
 - Dome Grate -D
 - Flashing Clamp -C (Fig. 2515 only)
 - Hinged Grate -H
 - "Safe-Set" Sediment Bucket -B
 - Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
 - Vandal Proof Grate -U

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB
 - Stainless Steel (Specify Fig. 9750)

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2510
 SIZE A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 FIGURE NUMBER 2510, 2515

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET
F	5-28-98	Submittal Update	ASL	BS		
E	4-9-97	Added Millimeters	EMB	BS		

FIGURE NUMBER
2510, 2515