


FLOOR DRAINS
WITH 8 1/2" ROUND ADJUSTABLE TOPS

MEDIUM DUTY DRAINS WITH TRACTOR GRATE AND ADJUSTABLE TOP

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

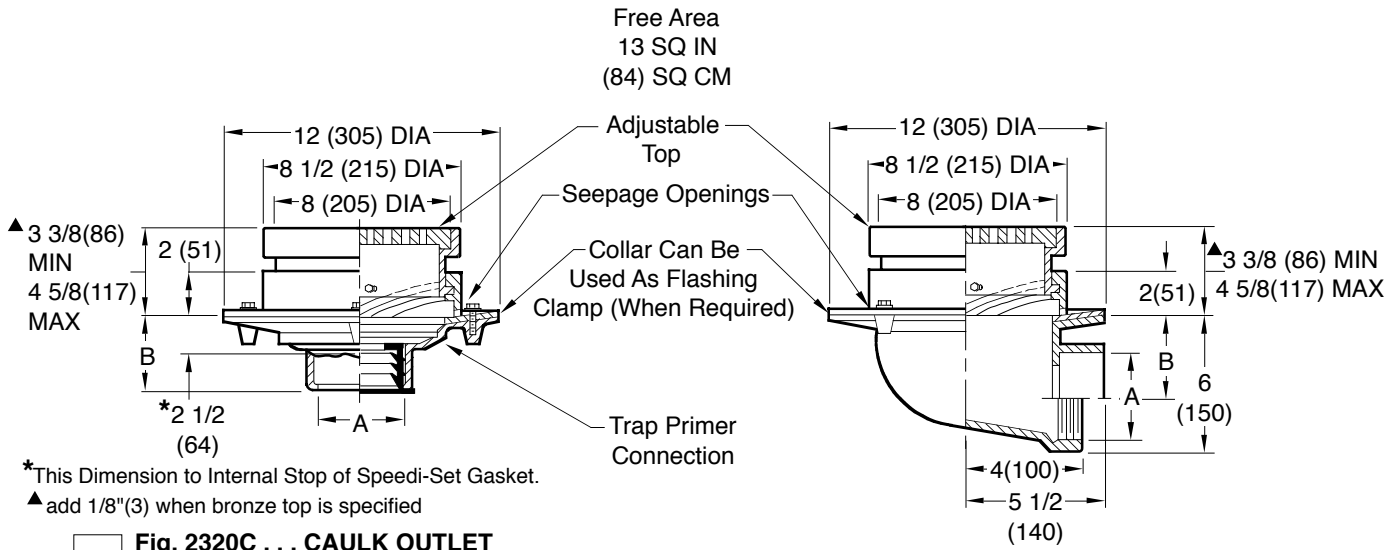

*This Dimension to Internal Stop of Speedi-Set Gasket.
 ▲ add 1/8"(3) when bronze top is specified

- Fig. 2320C ... CAULK OUTLET
- Fig. 2320T ... THREADED OUTLET
- Fig. 2320Y ... NO-HUB OUTLET

| A SIZE | 02 (50) | 03 (75) | 04 (100) | 06 (150) |
|--------|---|---------|------------------------|----------|
| B | 3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, | | 3 3/4 (95) NO-HUB Only | |
| | 2 (51) for Threaded | | | |

- Fig. 2325C ... CAULK OUTLET
- Fig. 2325T ... THREADED OUTLET

| A SIZE | 02 (50) | 03 (75) | 04 (100) |
|--------|-------------|------------|------------|
| B | 4 1/4 (110) | 3 3/4 (95) | 3 1/4 (83) |

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Adjustable Top and Tractor Grate.

VARIATIONS:

- Closure Plug -XP (Fig. 2320 only)
- Extension (Specify Height) -E
- Flat Bottom Strainer -FBS (Fig. 2320 only)
- L Speedi-Set Service Weight (Fig. 2320 only)
- LXH Speedi-Set Extra Heavy (Fig. 2320 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2325 only)
- Square Top -S
- * Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
- Vandal Proof Grate -U
- Heel Proof Grate -Q45
- Bucket -B
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2320 Only)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

*Not available on Fig. 2320T threaded outlet drain.

NOTE Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S2320
 SIZE: A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 FIGURE NUMBER: 2320, 2325

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

| REV. | DATE | DESCRIPTION | BY | CKD. BY | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
|------|---------|-------------------------------|-----|---------|---------------|-------------------|-------------------|
| M | 9-11-19 | Rev. Fig. Opts and Variations | MW | CL | | | 2320, 2325 |
| L | 7-22-19 | Added Load Rating | MW | JM | | | |
| K | 6-18-19 | Removed Function | MW | JM | | | |
| J | 6-18-15 | Revised Variations | TBW | CL | | | |