


TRAFFIC FLOOR DRAINS

SQUARE TOP DRAINS WITH FREE STANDING SEDIMENT BUCKET

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard.
 For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

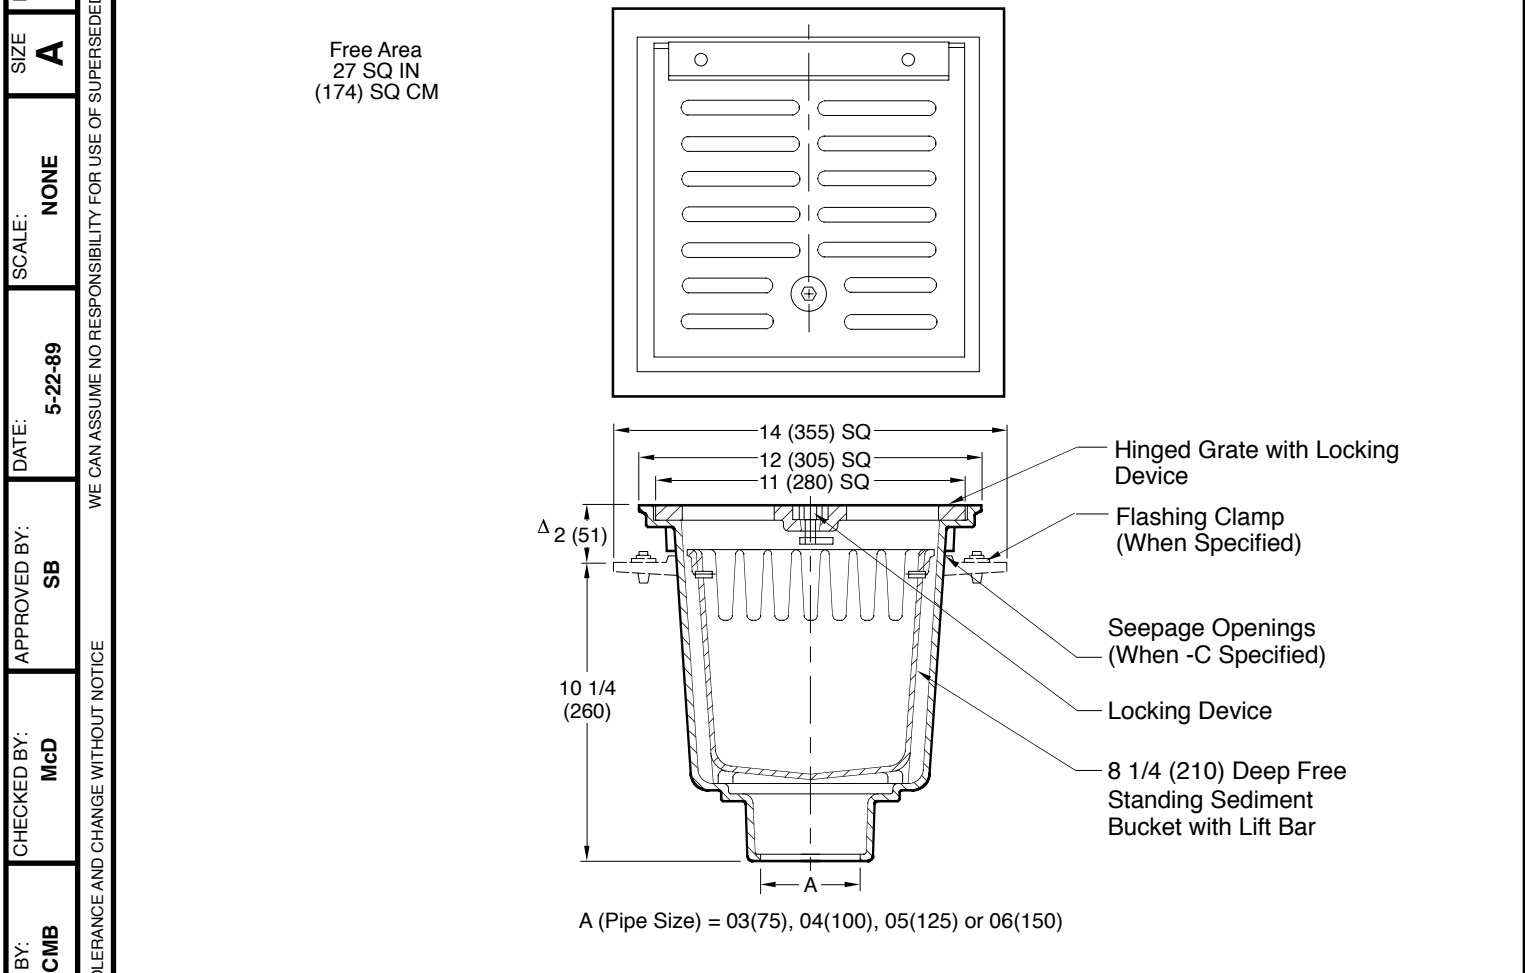

- Δ add 3/16" (5) when bronze top is specified.
- Fig. 2410C . . . LESS FLANGE . . . CAULK OUTLET
- Fig. 2410Y . . . LESS FLANGE . . . NO-HUB OUTLET
- Fig. 2415C . . . WITH FLANGE . . . CAULK OUTLET
- Fig. 2415Y . . . WITH FLANGE . . . NO-HUB OUTLET

- | | | |
|--|--|--|
| <p>REGULARLY FURNISHED:
 Duco Cast Iron Body with Hinged Grate, Locking Device and Sediment Bucket.</p> | <p>VARIATIONS:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Flashing Clamp -C (Fig. 2415 only) <input type="checkbox"/> Loose Set Grate -LSG <input type="checkbox"/> Vandal Proof Grate -U <input type="checkbox"/> L Speedi-Set Service Weight
02(50), 03(75) & 04"(100) Sizes only <input type="checkbox"/> LXH Speedi-Set Extra Heavy
02(50), 03(75) & 04"(100) Sizes only <input type="checkbox"/> Quad Close Trap Seal (Specify Fig. 2692) | <p>OPTIONAL MATERIALS:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Ductile Iron Grate -M <input type="checkbox"/> Galvanized Cast Iron -G <input type="checkbox"/> Nickel Bronze Top -NB <input type="checkbox"/> Polished Bronze Top -PB |
|--|--|--|

NOTE: Dimensions shown in parentheses are in millimeters.

J H G F	7-25-19 6-18-19 6-18-15 11-18-05	Added Load Rating Removed Function Revised Variations Revised Chart	MW MW TBW RN	JM JM CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2410, 2415
REV.	DATE	DESCRIPTION	BY	CKD. BY			

DRAWING NUMBER S2410
 SIZE A
 SCALE: NONE
 DATE: 5-22-89
 APPROVED BY: SB
 CHECKED BY: McD
 DRAWN BY: CMB
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

2410, 2415