


FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

SQUARE NICKEL BRONZE TOP

FUNCTION: For use in finished floors bearing foot and medium load wheeled traffic. The square top is particularly adaptable to floors that are finished of material in straight line patterns. Allows for easy floor level adjustment.

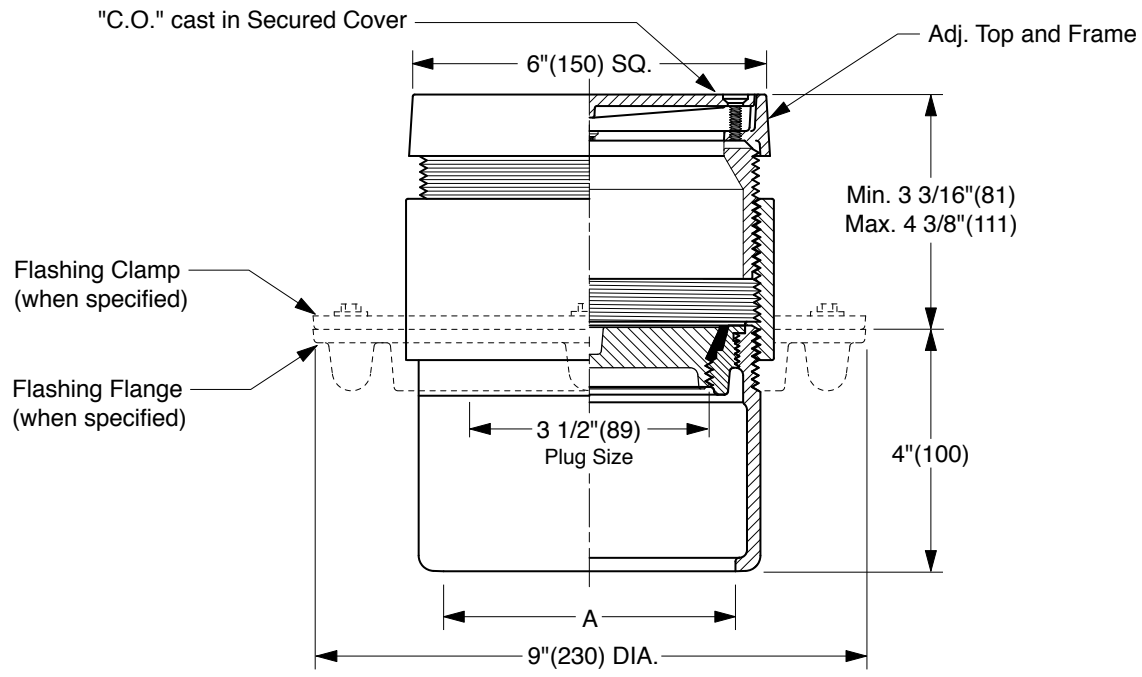

TWIS-TO-FLOOR® ADJUSTMENT
INSIDE CAULK OUTLET

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

- Fig. 4045C.....Gasket Seal - ABS Plug
- Fig. 4046C.....Gasket Seal - Bronze Plug
- Fig. 4048C.....Taper Thread - Bronze Plug
- Fig. 4049C.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)
NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:
Duco Cast Iron Cleanout with Square Adjustable Scoriated Secured Nickel Bronze Top. Closure Plug Type as Indicated by Figure Number Selected.

- VARIATIONS:**
- Flashing Flange -F
 - Flange with Flashing Clamp -F-C
 - Vandal Proof Top -U

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Polished Bronze Top -PB

DRAWING NUMBER S4045
SIZE A
SCALE: NONE
DATE: 2-16-70
APPROVED BY: JM
CHECKED BY: BH
DRAWN BY: RK
4045 SERIES
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

J H	07/26/02 10/17/00	Corrected Clamp & Flange view New design	JJ JJ	CL BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4045 SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY			