

H
 DRAWING NUMBER S2360
 SIZE A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 FIGURE NUMBER 2360, 2365

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FLOOR DRAINS

WITH ADJUSTABLE TOPS AND SEDIMENT BUCKETS

MEDIUM DUTY DRAINS WITH 12" (305) ROUND TOP - "SAFE-SET" BUCKET

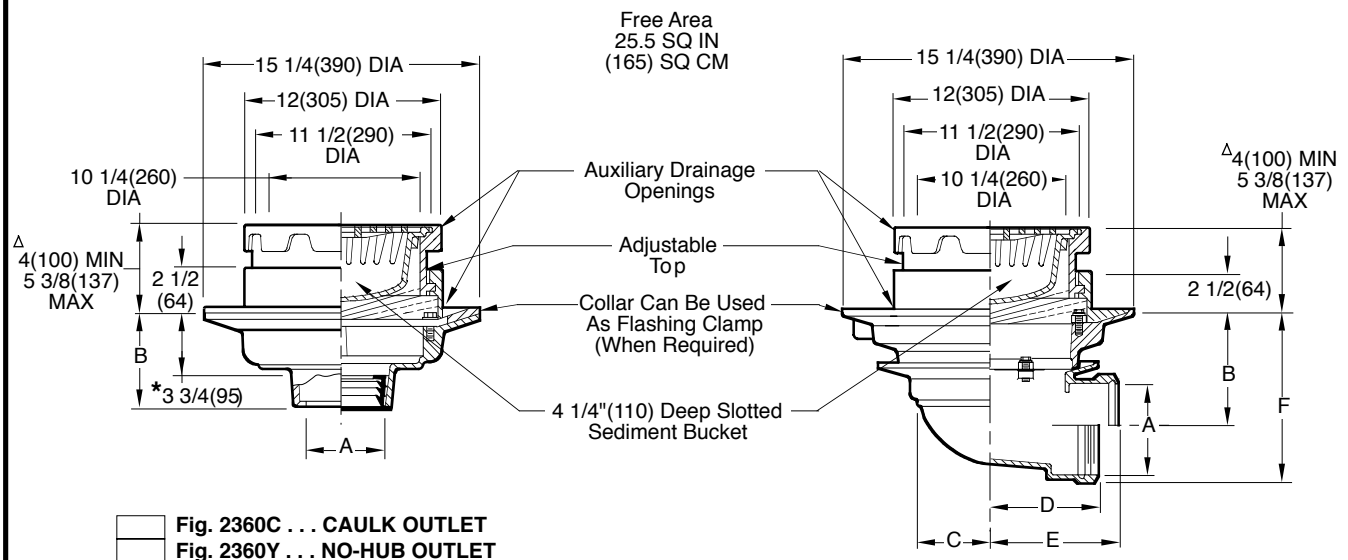


Fig. 2360C . . . CAULK OUTLET
 Fig. 2360Y . . . NO-HUB OUTLET

Fig. 2365C . . . CAULK OUTLET
 Fig. 2365T . . . THREADED OUTLET

A SIZE	02(50)	03(75)	04(100)	05(125)	06(150)
B	5(125) for Caulk, NO-HUB and Speedi-Set 3 3/4(95) for Threaded				

NOTE: 02(50), 03(75), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

*This Dimension to Internal Stop of Speedi-Set Gasket

Δ add 5/16"(8) when bronze top is specified.
 Δ add 7/8"(22) when hinged top is specified.
 • Hinged grate not available in safe-set design with suspended bucket. Full grate is provided with a free standing bucket

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)
D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)
E	7 1/4 (185)	7 1/2 (190)	7 3/4 (195)	7 3/4 (195)	7 3/4 (195)
F	8 5/8 (216)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)

REGULARLY FURNISHED:

Duct Cast Iron Body and Flashing Collar with Adjustable Top and Bar Grate with Sediment Bucket.

VARIATIONS:

- Adjustable Extension 4 1/2(115) to 6"(150) -E
- Flat Bottom Strainer -FBS
- Hinged Grate -H
- L Speedi-Set Service Weight
02(50), 03(75) & 04"(100) sizes only (Fig. 2360 only)
- LXH Speedi-Set Extra Heavy
02(50), 03(75) & 04"(100) sizes only (Fig. 2360 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2365 only)
- Square Top -S
- Vandal Proof Grate -U
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2360 Only)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

H	6-18-19	Removed Function	MW	JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
G	6-18-15	Revised Variations	TBW	CL			
F	8-27-10	Chg'd Millimeters	RN	CL			
E	2-1-96	Added Millimeters	EMB	BS			
REV.	DATE	DESCRIPTION	BY	CKD. BY	2360, 2365		